


Confidential

See SRL report C/22773/T01 for full details

The Laboratory Measurement of Random Incidence Sound Absorption to BS EN ISO 354:2003

Client: Comfortex Ltd
Test Date: 11/04/2014
Empty Room: Temperature: 16.8 °C Humidity: 51 %RH Pressure: 1013 mbar
Room with Sample: Temperature: 17.0 °C Humidity: 49 %RH Pressure: 1013 mbar
Sample Description: Profile Acoustic Foam Tile 100mm (Block 100)
Mounting Method: A
Sample Area: 13.25 m2
Chamber Volume: 300 m3

Test 4				
Freq Hz	T1 sec	T2 sec	Absorp Coeff	Practical Absorp Coeff #
50*	5.21	3.54	0.33	
63*	5.27	3.91	0.24	n/a
80*	6.20	4.53	0.22	
100	6.75	4.05	0.36	
125	7.14	3.94	0.42	0.45
160	6.70	3.19	0.60	
200	7.08	2.67	0.86	
250	7.17	2.32	1.07	1.00
315	7.18	2.25	1.12	
400	6.50	2.12	1.17	
500	5.34	1.87	1.27	1.00
630	5.02	1.93	1.17	
800	5.40	2.09	1.08	
1000	5.90	2.13	1.10	1.00
1250	5.61	2.05	1.13	
1600	5.00	1.95	1.14	
2000	4.55	1.89	1.13	1.00
2500	4.01	1.78	1.14	
3150	3.36	1.61	1.17	
4000	2.66	1.40	1.22	1.00
5000	2.08	1.23	1.19	
6300*	1.45	0.95	1.28	
8000*	1.17	0.80	1.38	n/a
10000*	0.82	0.61	1.44	

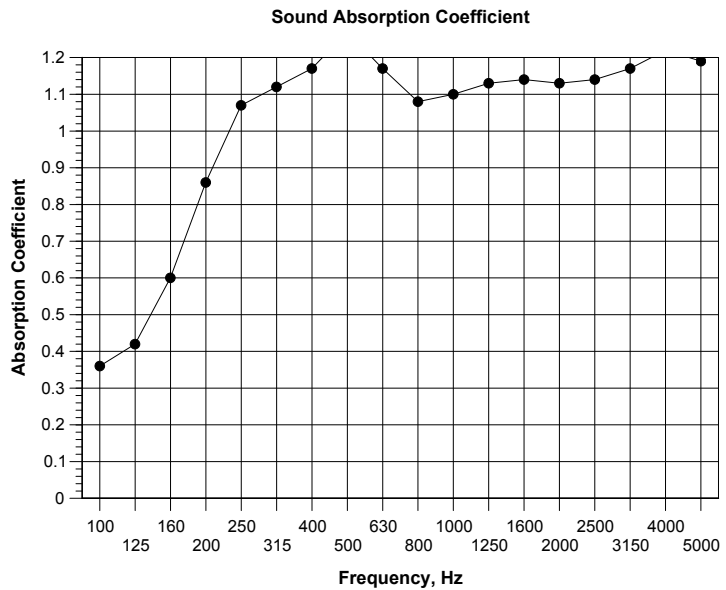

α_w 1.00
Class A
 Calculated to EN ISO 11654:1997
NRC 1.15
 Calculated to ASTM C 423-01
 * Denotes frequencies outside the range covered by BS EN ISO 354:2003
 T1, empty room reverberation time
 T2, room reverberation time with sample

Practical absorption coefficient, BS EN ISO 11654:1997

v4.3